



estillon
FUNDAMENTAL FOR FLOORS SINCE 1965

XPS RANGE

THE IDEAL UNDERLAY TO USE WITH LAMINATE AND LVT CLICK FLOORS


With the XPS range, Estillon has the ideal underlay to use with laminate and LVT click floors.

These XPS underlays have a high pressure resistance and create a completely flat and smooth base for your laminate and LVT click floors.

XPS LVT
1.5mm



XPS Laminate
2.2mm

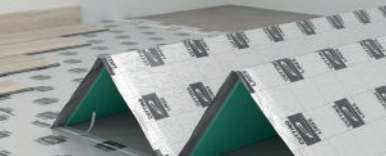

- Material xps foam
- High Compressions strength
- Creates a fully flat and smooth basis
- High level of load resistance
- Suitable for domestic use and commercial



estillon
FUNDAMENTAL FOR FLOORS SINCE 1965

XPS RANGE

Specifications XPS range

	XPS LVT 1,5 mm	XPS Laminate 2,2 mm
Thickness	1.5 mm	2.2 mm
Dimensions	8.5x1.18 m = +/-10.03 m ²	5.1x1.18 m = +/-6.018 m ²
Weight	150 gr/m ²	70 gr/m ²
Density	100 kg/m ³	32 kg/m ³
Material	AS Layer/High density XPS foam	Moisture barrier/High density XPS foam
Punctual conformity	0.2 mm	0.2 mm
High compression strength	Class CS3 - CS > 400kPa	Class CS1 - CS > 90kPa
Weelchair test	Passed	Passed
Impact sound reduction	$\Delta L_w = 17$ dB	$\Delta L_w = 19$ dB
Fire retardancy	Efl-S1	Efl-S1

MORE INFORMATION AT WWW.ESTILLON.COM