




Floorfixx



- Fast levelling system
- Immediately ready to finish your floor
- Simple to install as a floating system
- Reduces noise

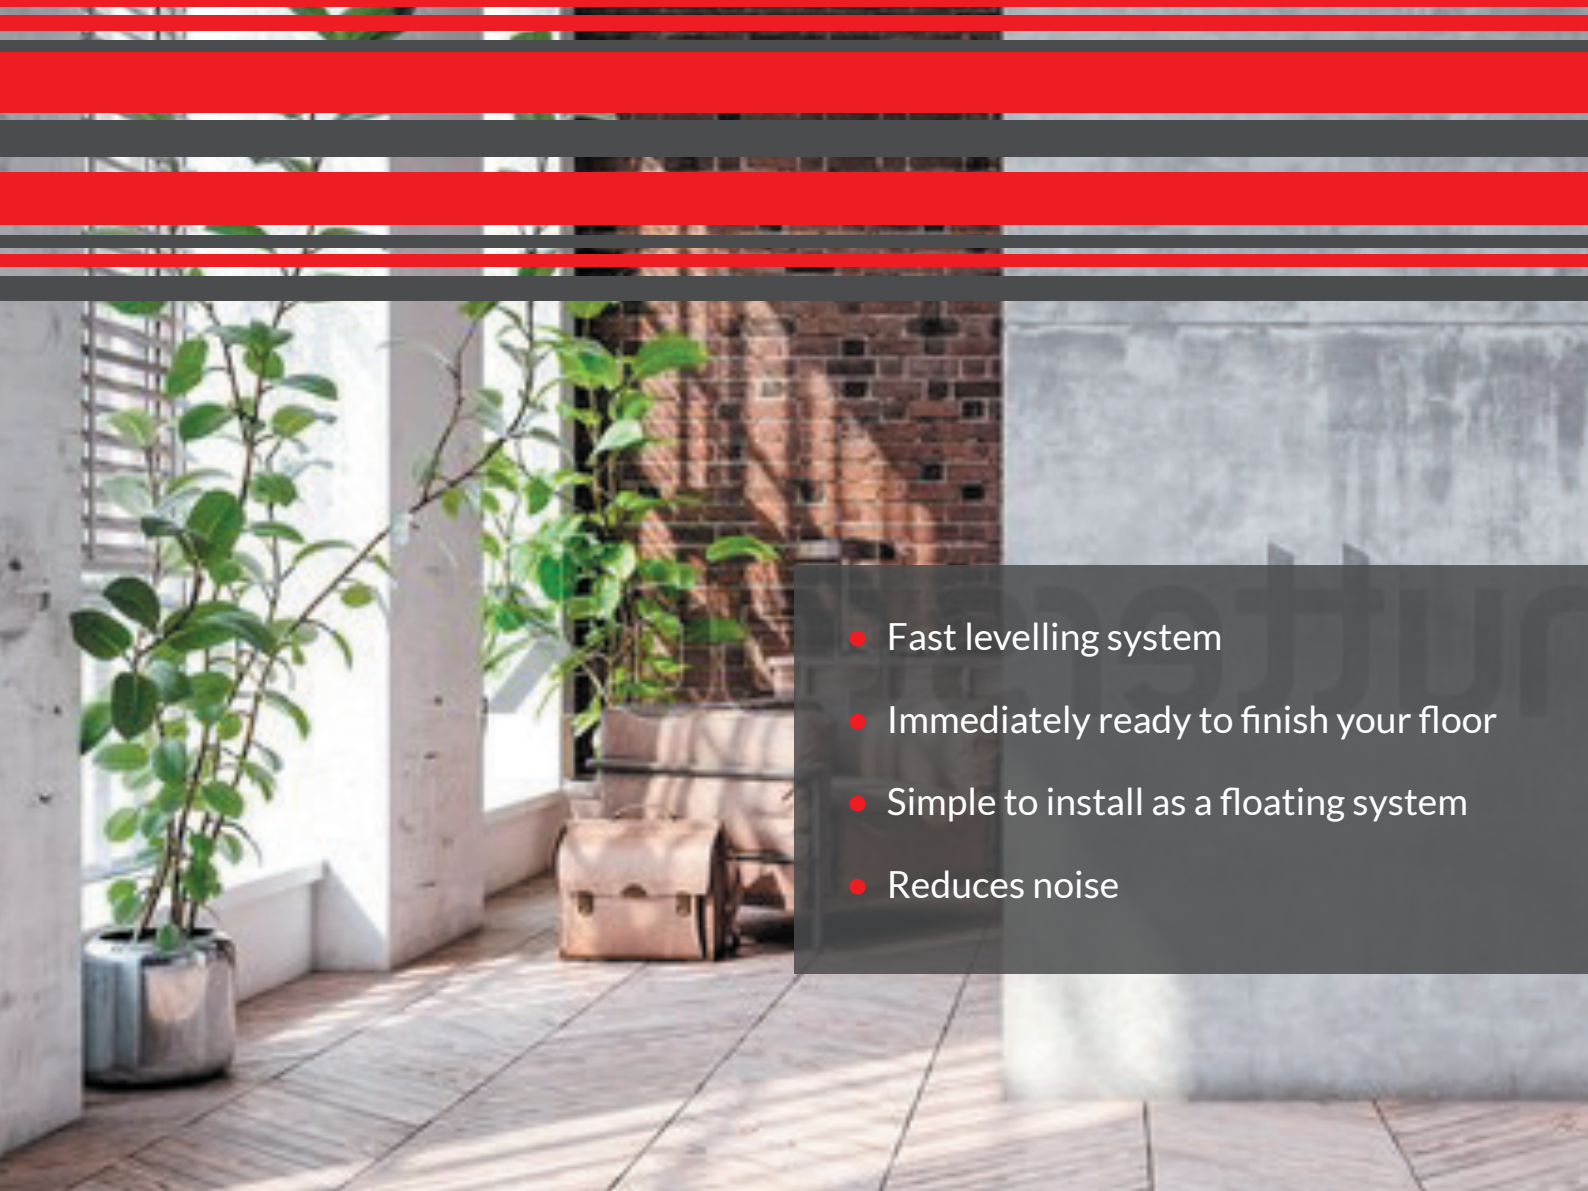

Do you recognise that your customers have little time for installing a new floor?
Estillon has the solution! Save time using the Floorfixx underlay range instead of wet levelling.

The Floorfixx dry levelling system

Floorfixx is the underlay range for rigid core, linoleum, cushion vinyl, LVT, LVT click, carpet, carpet tiles and parquet flooring. These underlays allow you to easily create a new, insulating and flat subfloor with a dry installation. Furthermore, these underlays can bear load immediately, there is no need to wait until it is dry. This is a major advantage compared to wet levelling. Time saving, simple and clean. And no long drying or waiting times.

With the aid of the sandwich system and interactive adhesive, the Floorfixx underlays quickly and easily create a new, insulating and even underlay that can bear load immediately. These underlays are suitable for residential and project applications. On top of that, the Floorfixx underlays insulate against impact noise. Always install these underlays combined with a vapour or moisture barrier!

The benefits of Floorfixx underlays

- Fast levelling system
- Immediately ready to finish your floor
- Simple to install as a floating system
- Reduces noise

Why Estillon for floor levelling?

- You can create a high quality, flat, stable, and permanently dry base floor with underlays
- Meet noise requirements
- Underlays lengthen the lifespan of your floor covering
- Underlays offer extra luxury and comfort

	Vinyl on rolls	Linoleum	PVC dry back >2,5mm	PVC dry back >2 mm	LVT click	Carpet	Carpet tiles	Parquet flooring	Rigid core
Floorfixx Fini	yes floating				yes		yes		yes
Floorfixx Smart			yes		yes	yes	yes		
Floorfixx Regular	yes	yes	yes	yes	yes	yes	yes		yes
Floorfixx Comfort	yes	yes	yes	yes	yes	yes	yes	yes glued	
Floorfixx Optimum			yes						

NEW floorfixx optimum

made in Holland by estillon

Floorfixx optimum is a system floor with a unique self-adhesive layer: traditional glue is no longer required. With Floorfixx optimum, you quickly create a new, insulating, level and immediately usable underlay.

Floorfixx optimum provides for easy installation: each centimetre holds exactly the right glue connection, with less risk of flooring coming loose. Every installed floor achieves its maximum strength.

No need to take waiting and drying times into account because the floor can be used immediately. In practice, using Floorfixx optimum represents significant savings of time and money.

Installation is easy with the handy lap joint connection. Create the installation plan easily on the silicone paper. You can start and stop installation at any time since the silicone paper remains in place during installation. Floorfixx optimum is suitable for both residential and commercial applications.

- Rapid installation due to self-adhesive layer
- No use of traditional glue
- Renovation of poor subfloors under LVT Dry Back strips and tiles with thickness of at least 2.5 mm
- No waiting/drying times and can bear load immediately
- Levels out unevenness and provides maximum stability
- Guarantees a flat, solid base for your installation

Floorfixx optimum 8mm floorfixx optimum 62107



Description







Floorfixx optimum is a system floor with a unique self-adhesive layer
LVT Dry Back strips and tiles
MDF-XPS 4843 gram/m²

Type of floor

Material

installation plan:



Thickness mm	Length m	Width m	Content m ²	 Fire delay	 Impact sound reduction dB	 Leveling capability mm	 Pressure resistance kPa/m ²	 Heat resistance m ² k/W	 Density kg/m ³
8	0,825	0,565	2,8	Bfl-S1	20	2,00	214	0,123	720

Floorfix fini 8 mm floorfix fini

62074



Description Floorfix fini is a system floor that absorbs small irregularities in the subfloor

Type of floor Rigid Core, carpet tiles, vinyl and LVT click floors

Material MDF-XPS 2880 gram/m²

10 dB label yes

installation plan:



Thickness mm	Length m	Width m	Content m ²	Fire delay Efl-S1	Impact sound reduction dB	Levelling capability mm	Pressure resistance kPa/m ²	Heat resistance m ² k/W	Density kg/m ³
8	0,85	0,59	5,015	Efl-S1	21	2,00	149	0,213	360

Floorfix regular 9 mm floorfix regular

62200




Description Floorfix regular is a system floor that, with the help of the sandwich system and interactive adhesive, quickly and easily creates a new, insulating and even underlay

Type of floor Rigid Core, linoleum, cushion vinyl, LVT strips, carpet and carpet tiles

Material MDF-XPS 6050 gram/m²

10 dB label yes

installation plan:

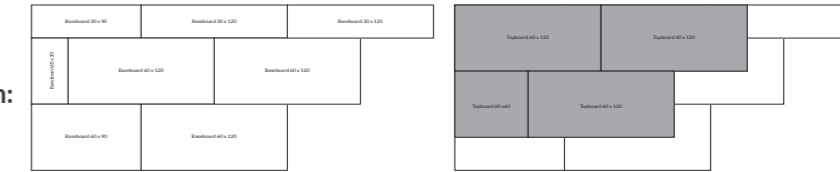

Thickness mm	Length m	Width m	Content m ²	Fire delay Bfl-S1	Impact sound reduction dB	Levelling capability mm	Pressure resistance kPa/m ²	Heat resistance m ² k/W	Density kg/m ³
9	1,20	0,60	2,88	Bfl-S1	22	2,00	251	0,133	720

Floorfix smart 8 mm floorfix smart

62104



Description Floorfix smart is a system floor that, with the help of the handy lap joint, easily creates a new, insulating and even underlay

Type of floor LVT, carpet and carpet tiles

Material MDF-XPS 4714 gram/m²

10 dB label yes

installation plan:



Thickness mm	Length m	Width m	Content m ²	Fire delay Bfl-S1	Impact sound reduction dB	Levelling capability mm	Pressure resistance kPa/m ²	Heat resistance m ² k/W	Density kg/m ³
8	0,825	0,565	2,8	Bfl-S1	20	2,00	240	0,123	720

Floorfix comfort 10 mm floorfix comfort

62210



Description Floorfix comfort is a system floor suitable for heavier commercial use and in combination with underfloor heating.


Type of floor Linoleum, cushion vinyl, PVC, carpet, carpet tiles and parquet flooring

Material MDF-XPS 6900 gram/m²

Underfloor heating yes

10 dB label yes


installation plan:

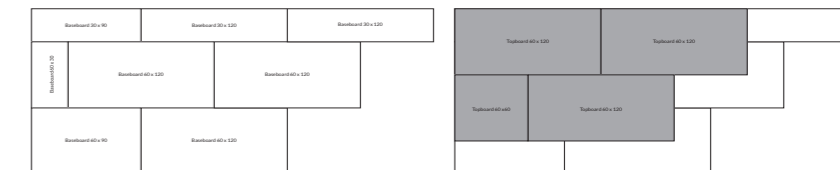

Thickness mm	Length m	Width m	Content m ²	Fire delay Bfl-S1	Impact sound reduction dB	Levelling capability mm	Pressure resistance kPa/m ²	Heat resistance m ² k/W	Density kg/m ³
10	1,20	0,60	2,88	Bfl-S1	20	1,00	168	0,081	720

SPANfloor12 mm / KOMBIfloor 17 mm

62106 62105

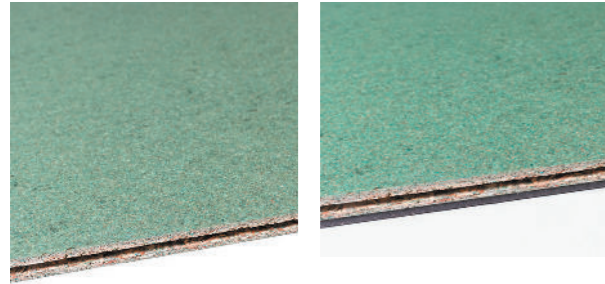

Description System floors for the renovation of poor base floors
Material Moisture-resistant V313 chipboard
Underfloor heating No

	Thickness mm	Length m	Width m	Content m ²	Fire delay Bfl-S1 %	Impact sound reduction dB	Leveling capability mm	Pressure resistance kPa/m ²	Heat resistance m ² k/W	Density kg/m ³
SPANfloor 62106	12	1,20	0,60	2,16	NA	16	18	NA	0,21	600
KOMBIfloor 62105	17	1,20	0,60	2,16	NA	19	18	NA	0,25	600

Floorfixx Balance 020 / Floorfixx Balance 200

62215 62216



Description Dry levelling fill for levelling hollow spaces or height differences that need to be accommodated
Material Mineral-coated wood chips
Underfloor heating yes

Floorfixx Balance

Floorfixx Balance 200 is a dry levelling fill (according to DIN 18560-2) made of mineral-coated wood chips. This patented process guarantees the longevity of the product. The grains remain permanently stable, do not crumble and are resistant to mould. The outstanding advantage is the processing without water or binding agents. The fill is stable in position and can be walked on immediately after installation.

	Grain size	Weight	Material requirement	Installation height	Fire delay	Grain compressive strength	Heat resistance
FLOORFIXX Balance 020 62215	2 - 4 mm	370 kg/m ³	10Ltr./m ² /cm H.	0-20 mm	B1 / Bfl-S1	8,2 N/mm ²	0,075 W/mK
FLOORFIXX Balance 200 62216	4 - 8 mm	360 kg/m ³	10Ltr./m ² /cm H.	10-200 mm	B1 / Bfl-S1	12,6 N/mm ²	0,080 W/mK

Floorfixx stripes
62094



Floorfixx stripes can be used in combination with the Floorfixx smart and Floorfixx optimum system floors. Intended for use under the edge on the first row so that you do not have to cut these Floorfixx boards. You can also use the stripes as a filling strip where necessary. Dimensions: 820 x 65 x 5.2 mm. Bundle of 7 pieces.

Moisture barrier 160 µm
69781/69780

Moisture barrier film is completely moisture proof according to the standard of the EPLF



Rubber mallet, white 560 g
R10514



Leaves no marks. Also perfect for fixing anodized profiles. One head curved and one head flat. Wooden handle. Size 2, ø 64 mm

Extendable hand roller
R10955

Extendable Hand Roller with 3 rubber rollers
 Length 40-70 cm
 Width 19 cm



Linoleum roller 45 kg
R10944



With 3 rollers
 Width 40 cm

Spraycan adhesive 12 x 500 ml
R0023

High Tack contact adhesive in spray can, based on synthetic rubber. Does not contain harmful CFK's



Tapiton Alu (24r) 50 mm x 25 mtr
R50220



Tapiton Alu is a damp-proof aluminium tape for sealing PE moisture barriers and underlays equipped with a moisture barrier

Delfin Knife with pouch
R10633

Delivery with black plastic case

Concave blade 0,65 mm, content 10x10
 R10390



About Estillon

- Over 50 years of experience
- An extensive selection of flooring systems, carpet underlays and tools
- Well-known brands such as Egalssoft, Bestbase, Floorfixx, Roberts
- Specialised expertise, professional service and innovative products
- Supplies wholesalers, hotel chains, casinos, theatres, cruise ships, offices
- The products are successfully distributed by sales partners and agencies throughout the world
- Estillon is official partner of Quietroom® label for hotels

Visit www.estillon.com for up-to-date information, the digital catalogue and contact page.

Estillon can provide you with all the accessories you need for your carpet installation:



estillon

Estillon B.V.

Linie 25
5405 AR Uden
The Netherlands
T +31 (0)413 / 42 74 27
F +31 (0)413 / 42 74 28
E info@estillon.nl
I www.estillon.com

Estillon GmbH

Fössestraße 77 c
30453 Hannover
Germany
T +49 (0)511 / 353639-38
F +49 (0)511 / 353639-37
E info@estillon.de
I www.estillon.de

Estillon S.A.R.L.

64 Rue Claude Chappe
78370 Plaisir
France
T +33 (0)1 30 54 23 46
F +33 (0)1 30 54 06 29
E info@estillon.fr
I www.estillon.fr



Estillon is part of  interfloor Group Limited

Watch the installation videos on our YouTube channel

