



**estillon**  
WE WILL IMPROVE YOUR FLOOR

# IMO

## CERTIFIED UNDERLAYS

To ensure safety on ships, the United Nations has established the International Maritime Organization (IMO). This organization ensure that safety and environmental requirements on board ships are complied with.

Flamecheck 4, 6 & 8 mm




- Flame retardant underlay
- Suitable for the double-stick and stretch-fit installation of carpets
- Environmentally friendly production

Fenixbase 4, 6 & 8 mm



- Very high pressure-recovery capacity
- Light in weight and easy to process
- Environmentally friendly production and 100% recycled

Duralay Multi-fit 1,5 mm

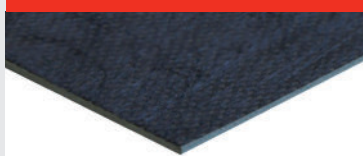

- Specifically designed for LVT flooring
- Improved noise reduction
- Suitable in combination with floor heating


Oceanbase Contract FR 6 mm



- Light in weight and easy to process
- Environmentally friendly production and 100% recycled
- Offers optimum comfort and experience of luxury

## IMO Certificering

IMO also issues certification for products that meet these strict requirements. One of the most important parts of the IMO certification is the FTP (Fire test procedure). The product is extensively tested for surface flammability and smoke development. According to IMO (the International Maritime Organization), Estillon's products have excellent fire-resistant properties and the quality of the production process is guaranteed. You can easily recognize our products with an IMO certification by the wheel logo.

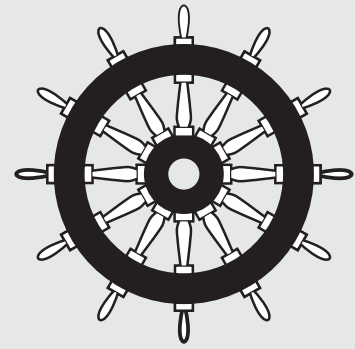

### Specifications IMO range

Product name	Thickness	Floor Type	Weight in gr/m <sup>2</sup>	Density kg/m <sup>3</sup>	Terminal Resistance m <sup>2</sup> K/W	Material	Installation method	Impact sound reduction
Tredaire Flamecheck	4 mm	Carpet	633	145	0,10	Recycled rebond polyurethane foam	DS / SF	26 dB Δlw
Tredaire Flamecheck	6 mm	Carpet	928	145	0,18	Recycled rebond polyurethane foam	DS / SF	35 dB Δlw
Tredaire Flamecheck	8 mm	Carpet	1272	145	0,16	Recycled rebond polyurethane foam	DS / SF	30 dB Δlw
Fenixbase	4 mm	Carpet	666	140	0,12	Recycled rebond polyurethane foam	DS / SF	24 dB Δlw
Fenixbase	6 mm	Carpet	866	140	0,18	Recycled rebond polyurethane foam	DS / SF	27 dB Δlw
Fenixbase	8 mm	Carpet	1133	140	0,2	Recycled rebond polyurethane foam	DS / SF	29 dB Δlw
Duralay LVT Multi-fit	1,5 mm	LVT, wood and Laminate	2500	1667	0,012	Sponge Rubber	FF / SS / DS	18 dB Δlw
Oceanbase Contract	6 mm	Carpet	909	140	0,18	Recycled rebond polyurethane foam	DS / SF	28 dB Δlw

DS= Double Stick  
 SF = Stretch-fit  
 SS = Single Stick  
 FF = Floating Floor