



LVT UNDERLAYS

LVT flooring is incredibly popular, and for good reason. The floors are almost indistinguishable from real wood or stone and are easy to install. In addition, LVT floors are easy to maintenance friendly, soundabsorbing and moisture-resistant.

When you are going to install a LVT floor, you can't just use any underlay. Each situation requires a different underlay.

Floorfixx optimum 8 mm



- Quick installation due to self-adhesive layer
- Levels out unevenness and provides maximum stability
- Specific underlay for LVT Dryback

Floorfixx regular 9 mm




- Quick installation, can bear load immediately
- Easy to install
- Suitable for LVT Dryback, LVT Click and LVT Rigid Click

Duralay Multi-fit 1,5 mm



- IMO flame retardant underlay
- Improves noise reduction
- Suitable in combination with underfloor heating

Whisper black 1,0 mm

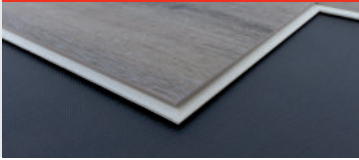

- Improves noise reduction
- High pressure resistance to protect the click connection
- Suitable in combination with underfloor heating

Soundstop LVT 1,0 mm



- Very high Compressions strength (CS > 999 kPa/m²)
- Stable and easy to install
- Suitable for LVT Click

Solidbase SK 1,8 mm



- High-density underlay
- Quick installation due to self-adhesive layer
- Specific underlay for LVT Dryback

We produce and deliver a matching underlay for every situation! A good underlay is just as important as the floor that will be installed on it. Because it is your underlay that largely determines the enjoyment of use and the lifespan of your floor.

Our collection of underlays ensures that your LVT floor stays in top condition.

We will improve your floor

Specifications LVT range

| Product name | Thickness mm | Floor Type | Weight in gr/m ² | Density kg/m ³ | Terminal Resistance m ² K/W | Material | Installation method | Impact sound reduction | Fire Retardancy |
|-----------------------|--------------|--|-----------------------------|---------------------------|--|-------------------------------|---------------------|------------------------|-----------------|
| Floorfixx optimum | 8 | LVT Dryback | 4843 | 720 | 0,213 | MDF, XPS foam, adhesive layer | FF | 21 dB Δlw | Bfl-S1 |
| Floorfixx Regular | 9 | LVT Click, LVT Dryback and LVT Rigid Click | 6050 | 720 | 0,133 | MDF, XPS foam | FF | 22 dB Δlw | Bfl-S1 |
| Duralay LVT Multi-fit | 1,5 | LVT Click, LVT Dryback | 2500 | 1667 | 0,012 | Sponge Rubber | FF / SS / DS | 18 dB Δlw | IMO |
| Whisper Black | 1 | LVT Rigid Click | 133 | 133 | 0,024 | PE folie & foam | FF | 24 dB Δlw | Bfl-S1 |
| Soundstop LVT | 1 | LVT Click | 300 | 300 | 0,015 | PE foam & anti-slip coating | FF | 21 dB Δlw | Efl |
| Solidbase SK | 1,8 | LVT Dryback | 1450 | 905 | 0,006 | PU, mineralen, adhesive layer | FF | 17 dB Δlw | Bfl-S1 |

DS= Double Stick

SF = Stretch-fit

SS = Single Stick

FF = Floating Floor